


ALL IN ONE

Eco Beast (Single-Phase)

- 2 MPPTs, Max. 9.6kW PV input
- On/off-grid switching
- Battery module level monitoring
- PV or AC or generator wake up battery
- Expandable storage – up to 16pcs in parallel
- Remote monitoring and firmware updates with battery

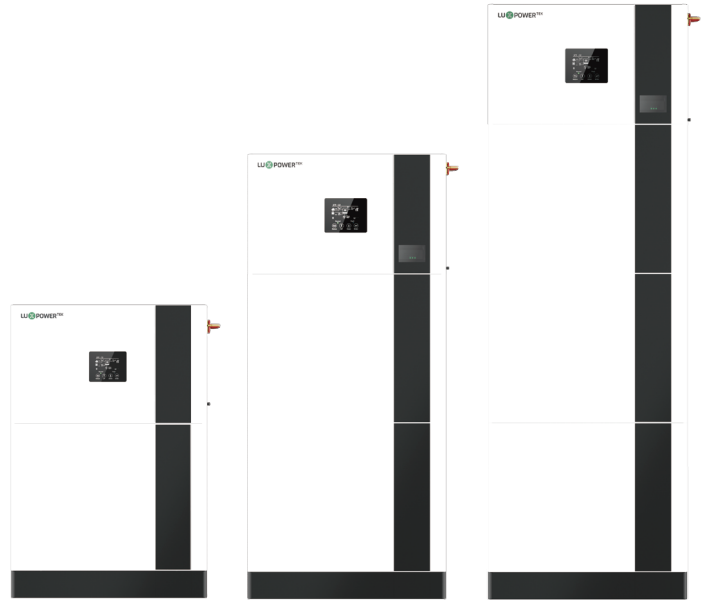

5kWh

10kWh Standard

15kWh



Model	
INVERTER MODULE	Eco Beast 6000
Input (PV DC)	
Max. PV input power (W)	9600 (4800 / 4800)
Rated PV input voltage (V)	320
Number of independent MPPT inputs	2 / (1:1)
Max. PV input voltage (V)	480
MPPT voltage range (V)	120 ~ 385
Start-up voltage (V)	100
Max. PV input current per MPPT (A)	17 / 17
Max. PV short-circuit current input per MPPT (A)	25 / 25
Max. PV charging current (A)	140
AC Output (Backup)	
Output voltage waveform	Pure sine wave
Output voltage regulation (V)	208 / 220 / 230 / 240 ± 5%
Output frequency (Hz)	50 / 60
Rated output power (W)	6000
Rated output current (A)	26.5
Peak efficiency	93%
Overload protection	5s@≥150% overload; 10s@110%~150% overload
Surge power	2 × rated power for 5s
Switching time	<7ms@Single; <20ms@Parallel
AC Input	
Rated input voltage (V)	230
Rated input frequency (Hz)	50 / 60 (Auto detection)
Max. AC input current (A)	39.5
Max. AC input power (W)	9000
Max. AC charging current (A)	140
Rated AC current of bypass relays (A)	60
Gen	
Rated GEN voltage (V)	220 / 230 / 240
Rated GEN frequency (Hz)	50 / 60
Rated GEN input Current (A)	32
Rated GEN input Power (W)	7370
Rated GEN current of bypass relays (A)	60
Battery Connection	
Battery module model	Battery Beast-5
Battery module voltage (V)	38.4 ~ 60
Number of modules per inverter	1 ~ 3
Efficiency	
Max. efficiency	93.5%
Max. charge/discharge efficiency	93.0%
Protection	
Grid monitoring	YES
AC surge protection	Type III
Standards & Certification	
NRS097-2-1:2024, EN/IEC62109-1/-2, EN61000, EN 62920	
Battery Module	
Battery power (kWh)	5.12
Rated voltage (V)	51.2
Rated capacity (Ah)	100
Battery type	Lithium-ion
Max. discharging current (A)	100
Max. charging current (A)	100
Dimension (W × H × D)	580 × 434 × 165 mm / 22.8 × 17.1 × 6.5 in
Net weight	54 kg / 119.1 lbs
Standard	UN38.3; CE
General Specifications	
Inverter module weight	17.5 kg / 38.6 lbs
Inverter module dimension (W × H × D)	580 × 350 × 165 mm / 22.8 × 13.8 × 6.5 in
Battery module weight	57.4 kg / 126.5 lbs
Battery module dimension (W × H × D)	580 × 434 × 165 mm / 22.8 × 17.1 × 6.5 in
Ingress protection rating	IP20
Display & Communication interface	LCD + LED, RS485 / Wi-Fi / CAN
Cooling method	Smart cooling
Topology	Transformerless
Noise emission (dB)	58
Operating temperature range (°C)	0 ~ 45
Storage temperature (°C)	-15 ~ 60
Humidity	5% to 95% Relative Humidity (Non-condensing)
Max. Operating Altitude (m)	2000