



YOUR RELIABLE ENERGY SOLUTION PARTNER

2026/

Lux Power Technology Co., Ltd

Headquarter:+86 755 8520 9056
www.luxpowertek.com
Contact us: sales@luxpowertek.com



Website



LinkedIn



Facebook



YouTube

**Residential & Commercial
Energy Storage Battery**

LOW VOLTAGE

• Li Series



Li-5 P01



Li-11.8 P01



Li-7.5e P01



Li-15e P01



Li-Stack P03

• PGEM Series



PGEM P05



PGEM PRO P05



PGEM MAX P05

• PSHIELD Series




PSHIELD P07



PSHIELD MAX P07


HIGH VOLTAGE

• PSTACK Series



PSTACK P09

• C Series




C14 P11



C5 P13

ENERGY STORAGE SOLUTION

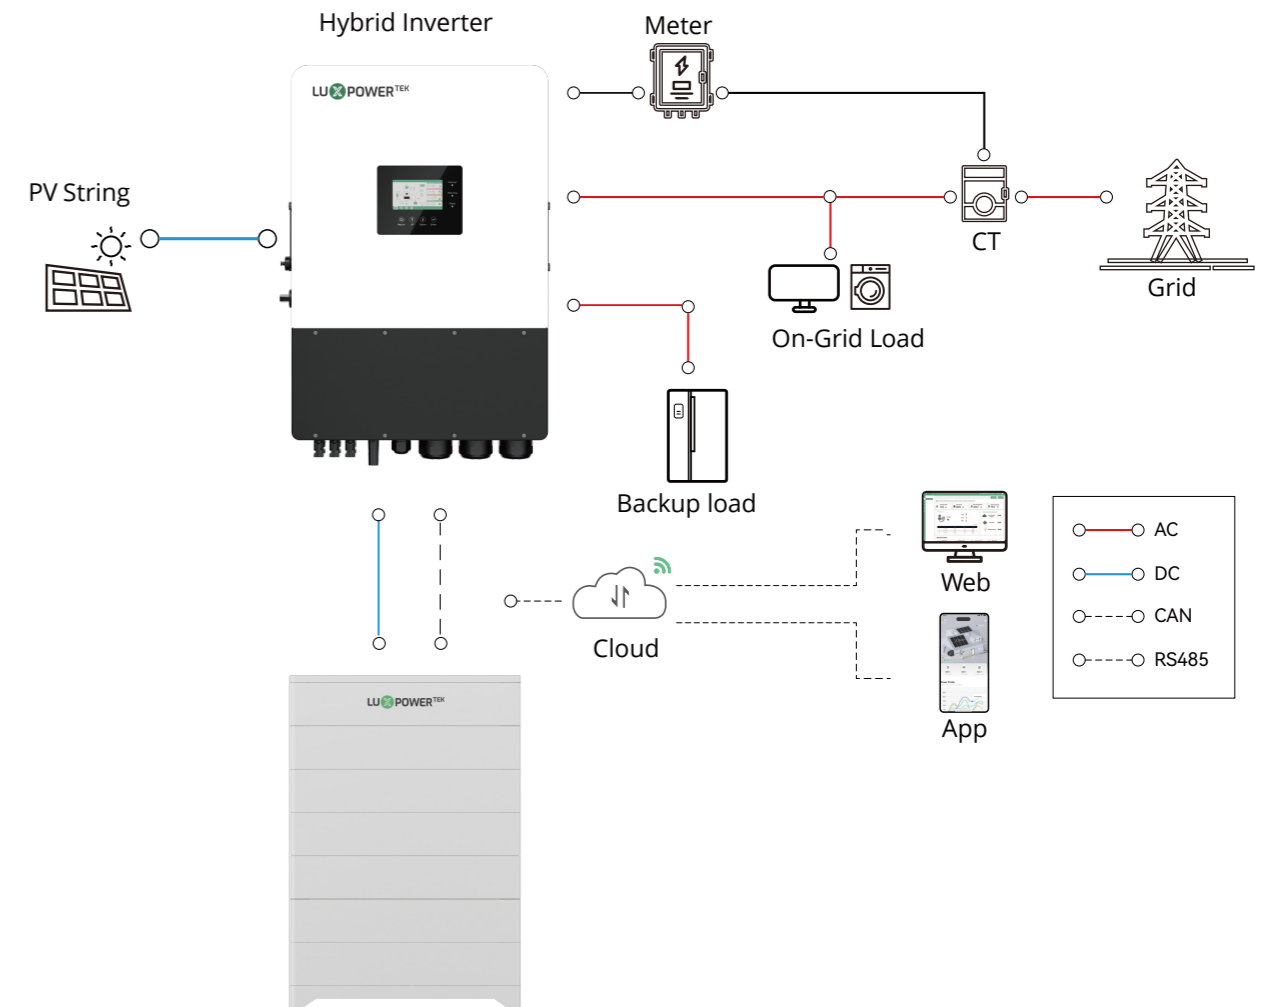

Residential

Self-consumption
+ Backup power



Commercial

Demand reduction
+ Energy cost saving



Remote Area

Off-grid energy
independence

Li-5 / Li-11.8 / Li-7.5e/ Li-15e (Low voltage)



Features

- High Efficiency**
 Up to 1C charge/discharge rate ensures stable, fast power delivery
- Long Lifespan & 10-Year Warranty**
 Reliable performance with ultra-safe LiFePO₄ cells
- Smart BMS Management**
 Comprehensive safety for overcharge, over-discharge, and short circuit
- Enhanced Fire Safety**
 Integrated fire protection with built-in suppression module
- Remote Monitoring & Upgrade**
 Smart BMS enables real-time diagnostics and firmware updates
- Flexible Scalability**
 Supports up to 35-50 modules in parallel for higher capacity
- Intelligent System Integration**
 Seamlessly integrates with Luxpower inverters for unified monitoring, automatic pre-charge, charge/discharge management, and extended warranty support

Model	Li-5	Li-11.8	Li-7.5e	Li-15e
Electrical				
Rated Energy	5.12kWh	11.776kWh	7.5kWh	15kWh
Rated Capacity	100Ah	230Ah	300Ah	300Ah
Rated Voltage	51.2V	51.2V	25.6V	51.2V
Charge/Discharge Current	(Recommend)	50A	115A	140A
	(Max. Continuous)	100A	115/120A	140A
	(Peak 1)	105A (Peak1 15s)	125A (Peak1 15s) / 150A (Peak1 120s)	150A (Peak1 15s) / 150A (Peak1 120s)
	(Peak 2)	110A (Peak2 500ms) / 150A (Peak2 500ms)	150A (Peak2 500ms) / 200A (Peak2 500ms)	180A (Peak2 500ms) / 200A (Peak2 500ms)
Charge/Discharge Rate	1C	0.43C	0.5C	

General				
Cell Type	LFP			
Parallel	Up to 50 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running		Up to 35 units parallelable w/o extra device needed, slave battery drops offline or come back alive does not affect system running	
Dimension (W × H × D)	438 × 165 × 546 mm 17.24 × 6.5 × 21.5 in	440 × 229 × 600 mm 17.3 × 9.0 × 23.6 in	452 × 225 × 463 mm 17.8 × 8.9 × 18.23 in	452 × 225 × 743mm 17.8 × 8.9 × 29.25 in
Weight	49.4 kg / 108.9 lbs	81 kg / 178.57 lbs	55.67 kg / 122.73 lbs	104.9 kg / 231.26 lbs
IP Level	IP20			
Communication	CAN / RS485			
Humidity	5% ~ 85%RH (No condensation)			
Work Temperature	-20 ~ +55°C			
Storage Temperature	-10 ~ +35°C			
Remote Maintenance	Flexible remote monitor and maintenance, Original firmware backup to prevent upgrade failure		Flexible remote upgrade, Original firmware backup to prevent upgrade failure	
Warranty *	10 years, 6000 cycles		5 years, 6000 cycles	
Certification	CE; UN38.3; IEC62619		CE; UN38.3	CE; UN38.3; IEC62619
Protection	Overcharge/discharge/current/voltage/temperature protection Short circuit protection, Reverse connection protection Charge balance, Low SOC protection			

*@25°C, 90% DOD. 0.5C testing condition

Li-Stack (Low voltage)



Features



10 years warranty; Ultra safe LFP material



Flexible remote upgrade



1C rate continuous charge/discharge



Parallel up to 32 modules



300A max. discharge per stack, no exposed wire



Quick plug design for fast installation



Multi protection to avoid over discharge; Short circuit protection



Integrated fire protection with built-in suppression module

Model	Li-Stack
Cell Type	LFP
Rated Energy	5.12kWh per battery
Rated Capacity	100Ah per battery
Rated Voltage	51.2V
Charge Voltage	57.2V
Max. Charge / Discharge Current	100A
Discharge Peak Current	105A / 15s, 120A / 0.5s
Parallel	Up to 8 battery per stack and total 32pcs battery expandable
IP Level	IP65
Dimension (W × H × D)	TBD
Weight	TBD
Communication	CAN / RS485
Humidity	5% ~ 85%RH (No condensation)
Work Temperature	-20 ~ +55°C
Installation	Plug and Play
Remote Maintenance	Flexible remote upgrade, Original firmware backup to prevent upgrade failure
Warranty *	10 years, 6000 cycles
Certification	CE; UN38.3; IEC62619
Protection	Overcharge/discharge/current/voltage/temperature protection Short circuit protection, Reverse connection protection Charge balance, Low SOC protection

*@25°C, 90% DOD. 0.5C testing condition

PGEM/PGEM PRO/PGEM MAX (Low voltage)



Features



Ultra Safe LFP Material
Long-lifespan LiFePO₄ cells with over 8000 cycles.



Remote Upgrade & Active Balancing
Real-time monitoring, remote firmware updates, and low self-consumption.



High Efficiency Performance
Up to 200 A continuous discharge and 1C charge/discharge rate.



Parallel Scalability
Supports up to 32-50 modules in parallel for flexible capacity expansion.



Smart BMS Management
Multi-level protection for overcharge, over-discharge, and short circuit.



Wall-mounted Compact Design
Sleek and space-saving, ideal for residential energy storage.



Enhanced Fire Safety
Integrated fire protection with built-in suppression module.



Installer-Friendly Design
Stackable and multi-mount installation options (PGEM MAX only)

Model	PGEM	PGEM PRO	PGEM MAX
Electrical			
Rated Energy	5.12kWh	14.3kWh	16.076kWh
Rated Capacity	100Ah	280Ah	314Ah
Rated Voltage	51.2V	51.2V	51.2V
Charge/Discharge Current	(Recommend)	50A	140A
	(Max. Continuous)	100A	140A
	(Peak 1)	105A (Peak1 15s)	160A (Peak1 15s) / 160A (Peak1 300s)
	(Peak 2)	110A (Peak2 500ms) / 150A (Peak2 500ms)	180A (Peak2 500ms) / 200A (Peak2 500ms)
Charge/Discharge Rate	1C	0.5C	

General			
Cell Type	LFP		
Parallel	Up to 50 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running	Up to 32 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running	Up to 50 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running
Dimension (W × H × D)	390 × 620 × 170 mm 15.35 × 24.41 × 6.69 in	475 × 900 × 237.5 mm 18.7 × 35.4 × 9.35 in	445 × 900 × 235 mm 17.5 × 35.4 × 9.25 in
Weight	51.45 kg / 113.43 lbs	120 kg / 264.55 lbs	113 kg / 249.12 lbs
IP Level	IP20		
Robust Applications	Auto-addressing and stronger protection		
Communication	CAN / RS485		
Humidity	5% ~ 85%RH (No condensation)		
Work Temperature	-20 ~ +55°C		
Storage Temperature	-10 ~ +35°C		
Remote Maintenance	Flexible remote monitor and maintenance, Original firmware backup to prevent upgrade failure	Flexible remote upgrade, Original firmware backup to prevent upgrade failure	Flexible remote monitor and maintenance, Original firmware backup to prevent upgrade failure
Warranty *	10 years, 6000 cycles	10 years, 8000 cycles	
Certification	CE; UN38.3; IEC62619		
Protection	Overcharge/discharge/current/voltage/temperature protection Short circuit protection, Reverse connection protection Stronger active balance, Low SOC protection		

*@25°C, 90% DOD. 0.5C testing condition

PSHIELD/PSHIELD MAX (Low voltage)



Features



IP65 Outdoor Protection

Built-in heating system and sealed enclosure for reliable operation in harsh or extreme weather.



Remote Monitoring & Firmware Upgrade

Handy access for diagnostics, updates, and long-term maintenance.



Ultra Safe LFP Material

Long-lifespan LiFePO₄ cells with over 8000 cycles and 10-year warranty.



Parallel Scalability

Supports up to 32-50 modules in parallel, with auto-addressing for easy system expansion.



Efficient Power Delivery

Up to 200A continuous discharge and 0.5C charge/discharge rate for stable performance.



Smart BMS Management

Multi-level safety for overcharge, over-discharge, short circuit, and temperature control.



Flexible Installation (MAX Only)

Optional wheels or standing foot design for easy movement and setup.



Enhanced Fire Safety

Integrated fire protection with built-in suppression module

Model		PSHIELD	PSHIELD MAX
Electrical			
Rated Energy		5.12kWh	16.076kWh
Rated Capacity		100Ah	314Ah
Rated Voltage		51.2V	51.2V
Charge/Discharge Current	(Recommend)	50A	160A
	(Max. Continuous)	100A	160A / 200A
	(Peak 1)	105A (Peak1 15s)	180A (Peak1 15s) / 210A (Peak1 120s)
	(Peak 2)	110A (Peak2 500ms) / 150A (Peak2 500ms)	200A (Peak2 500ms) / 220A (Peak2 500ms)
Charge/Discharge Rate		1C	0.5C

General		
Cell Type	LFP	
Parallel	Up to 50 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running	Up to 32 units parallel w/o extra device needed, 256 units parallel with hub, slave battery drops offline or come back alive does not affect system running
Dimension (W × H × D)	450 × 680 × 171.5 mm 17.72 × 26.77 × 6.75 in	475 × 900 × 235 mm 18.7 × 35.4 × 9.25 in
Weight	56.65 kg / 124.89 lbs	119 kg / 263.35 lbs
IP Level	IP65	
Robust Applications	Auto-addressing and stronger protection	
Communication	CAN / RS485	
Humidity	5% ~ 85%RH (No condensation)	
Work Temperature	-20 ~ +55°C, heating system built-in	
Storage Temperature	-10 ~ +35°C	
Remote Maintenance	Flexible remote monitor and maintenance, Original firmware backup to prevent upgrade failure	Flexible remote upgrade, Original firmware backup to prevent upgrade failure
Warranty *	10 years, 6000 cycles	10 years, 8000 cycles
Certification	CE; UN38.3; IEC62619	CE; UN38.3; IEC62619; UL1973; UL9540, FCC, IP65
Protection	Overcharge/discharge/current/voltage/temperature protection Short circuit protection, Reverse connection protection Charge balance, Low SOC protection	









*@25°C, 90% DOD. 0.5C testing condition

Battery Storage

PSTACK (High voltage)



Features

-  9 Series per Stack: Up to 45 kWh per stack
-  Remote Upgrade: Easy online updates
-  10 Years Warranty: 6000 reliable cycles
-  20 Stack Parallel: Expandable to large systems
-  Safe LFP Cells: Stable and fire-safe
-  High Voltage Battery: Higher efficiency and power
-  Short Circuit Protection: Built-in safety
-  Enhanced Fire Safety: Integrated fire protection with built-in suppression module

Model	PSTACK
Scalable Connection	2 ~ 9 pcs series per stack, up to 20 stack parallel
Battery module nominal voltage	70.4V
Battery module nominal capacity	72Ah
Battery module nominal energy	5.069kWh
Protection	IP65
Battery module voltage range	61.6V ~ 80.3V
Recommend charge / discharge current	36A, 0.5C per battery module
Max. continuous charge / discharge current	50.4A, 0.7C per battery module
Max. continuous charge / discharge power	3.548 kW per battery module
Series per stack	Max. 9 battery series, up to 45 kWh per stack
System expansion	10 stack parallel w/o extra device needed, 20 stack parallel with extra BAU installed
DOD	95%
Charging / Discharging temperature	0 ~ +55°C, -20 ~ +55°C
Recommend storage humidity	10% ~ 90%RH
Warranty *	10 years, 6000 cycles
Certification	CE; UN38.3; IEC62619
Remote Maintenance	Flexible remote upgrade, Original firmware backup to prevent upgrade failure

*@25°C, 95% DOD, 0.5C testing condition

Battery Capacity	Voltage	Weight	Dimension
10 kWh	140.8 V	124 kg / 273.4 lbs	736 × 503.5 × 382 mm / 29.0 × 19.8 × 15.0 in
15 kWh	211.2 V	170 kg / 374.8 lbs	736 × 640.5 × 382 mm / 29.0 × 25.2 × 15.0 in
20 kWh	281.6 V	216 kg / 476.2 lbs	736 × 777.5 × 382 mm / 29.0 × 30.6 × 15.0 in
25 kWh	352.0 V	262 kg / 577.6 lbs	736 × 914.5 × 382 mm / 29.0 × 36 × 15.0 in
30 kWh	422.4 V	308 kg / 679 lbs	736 × 1051.5 × 382 mm / 29.0 × 41.4 × 15.0 in
35 kWh	492.8 V	354 kg / 780.4 lbs	736 × 1188.5 × 382 mm / 29.0 × 46.8 × 15.0 in
40 kWh	563.2 V	400 kg / 881.8 lbs	736 × 1325.5 × 382 mm / 29.0 × 52.2 × 15.0 in
45 kWh	633.6 V	446 kg / 983.2 lbs	736 × 1462.5 × 382 mm / 29.0 × 57.6 × 15.0 in

Battery Storage

C14 (High voltage)



Features



High Performance: 0.5C continuous power for stable energy supply



Reliable Backup: Ensures uninterrupted power for critical loads



Modular Design: Flexible, stackable, and easily expandable



Smart Integration: Real-time monitoring and intelligent management



Long Lifespan: 6000 cycles with 280Ah capacity, 10-Year Warranty



IP65 cabinet (optional) for all-weather protection



Plug and Play: Fast deployment with modular setup



Sustainability Ready: Supports renewable energy and carbon neutrality



Enhanced Fire Safety: Integrated fire protection with built-in suppression module

Model		C14								
Battery module		100kWh	114kWh	129kWh	143kWh	157kWh	172kWh	186kWh	200kWh	215kWh
Rated voltage		51.2V								
Voltage range		44.8-56.8V								
Rated capacity		280Ah								
Rated energy		14.336kWh								
Rated charge / discharge current		140A								
Dimension (WxDxH) / Weight		504 × 781 × 236 mm / 108 kg								
Battery Rack										
Battery Rack Configuration		7S	8S	9S	10S	11S	12S	13S	14S	15S
Configuration		7 batt + 1 BCU	8 batt + 1 BCU	9 batt + 1 BCU	10 batt + 1 BCU	11 batt + 1 BCU	12 batt + 1 BCU	13 batt + 1 BCU	14 batt + 1 BCU	15 batt + 1 BCU
Rated energy		100.352kWh	114.688kWh	129.024kWh	143.36kWh	157.696kWh	172.032kWh	186.368kWh	200.704kWh	215.04kWh
Rated voltage		358.4V	409.6V	460.8V	512V	563.2V	614.4V	665.6V	716.8V	768V
Voltage range		313.6-397.6V	358.4-454.4V	403.2-511.2V	448-568V	492.8-624.8V	537.6-681.6V	582.4-738.4V	627.2-795.2V	672-852V
Rated charge / discharge		0.5C								
Display		7" Touch screen								
BMS		Included								
Communication		CAN								
Monitoring		RS485								
Dimension (WxDxH)		1048 × 748 × 1613 mm / 41.3 × 29.4 × 63.5 in					1048 × 748 × 2105 mm / 41.3 × 29.4 × 82.9 in			
Weight		890 kg / 1962.1 lbs	1000 kg / 2204.6 lbs	1110 kg / 2447.1 lbs	1215 kg / 2678.6 lbs	1325 kg / 2921.1 lbs	1500 kg / 3306.9 lbs	1605 kg / 3538.4 lbs	1725 kg / 3803.0 lbs	1850 kg / 4078.5 lbs
Protection level		IP20								
Certification		CE; UN38.3								
LCD Display										
Cell voltage		Yes								
Cell high voltage		Yes								
Cell low voltage		Yes								
Cell temperature		Yes								
Charge and discharge current		Yes								
Total battery voltage		Yes								
Battery SOC		Yes								
Fault warning		Yes								
Protection										
Short circuit protection		Yes								
Over current protection		Yes								
Over charge protection		Yes								
Over discharge protection		Yes								
Cell over-vol protection		Yes								
Cell under-vol protection		Yes								
Over temperature protection		Yes								

Battery Storage

C5 (High voltage)



Features



High Performance: 1C rate for reliable energy delivery with a 10-year warranty



Reliable Backup: Ensures uninterrupted power for critical loads



Modular Design: 15S & 20P configuration, flexible, stackable, and easily expandable



Sustainability Ready: Supports renewable energy and carbon neutrality



IP65 cabinet (optional) for all-weather protection



Smart Integration: Real-time monitoring and intelligent management



Plug and Play: Fast deployment with modular setup



High Safety: LFP chemistry for ultra-safe operation; Integrated fire protection with built-in suppression module



Long Lifespan: 6000 cycles with 100Ah capacity

Model	C5								
Battery module	10.24kWh	15.36kWh	20.48kWh	25.60kWh	30.72kWh	35.84kWh	40.96kWh	46.08kWh	51.20kWh
Type	LFP								
Rated voltage	51.2V								
Voltage range	44.8-56.8V								
Rated capacity	100Ah								
Rated energy	5.12kWh								
Rated charge / discharge current	100A								
Dimension (W×D×H) / Weight	474 × 585 × 178 mm / 51.35 kg								

Battery Rack										
Battery Rack Configuration	2S	3S	4S	5S	6S	7S	8S	9S	10S	
Voltage range	92.8-113.6V	139.2-170.44V	185.6-227.2V	232-284V	278.4-340.8V	324.8-397.6V	371.2-454.4V	417.6-511.2V	464-568V	
Rated charge / discharge	1C									
Display	7" Touch screen									
BCU&BAU	Included									
Communication	CAN									
Monitoring	CAN									
Protection level	IP20									
Certification	UN38.3									

LCD Display										
Cell voltage	Yes									
Cell high voltage	Yes									
Cell low voltage	Yes									
Cell temperature	Yes									
Charge and discharge current	Yes									
Total battery voltage	Yes									
Battery SOC	Yes									
Fault warning	Yes									

Protection										
Short circuit protection	Yes									
Over current protection	Yes									
Over charge protection	Yes									
Over discharge protection	Yes									
Cell over-vol protection	Yes									
Cell under-vol protection	Yes									
Over temperature protection	Yes									

Battery Capacity	Voltage	Weight	Dimension (W×D×H)
10.24 kWh	102.44 V	145.1 kg / 319.9 lbs	554 × 604 × 690 mm / 21.8 × 23.8 × 27.2 in
15.36 kWh	153.64 V	202.6 kg / 446.9 lbs	554 × 604 × 897 mm / 21.8 × 23.8 × 35.4 in
20.48 kWh	204.8 V	260.1 kg / 573.9 lbs	554 × 604 × 1104 mm / 21.8 × 23.8 × 43.5 in
25.60 kWh	256.0 V	317.6 kg / 700.3 lbs	554 × 604 × 1311 mm / 21.8 × 23.8 × 51.6 in
30.72 kWh	307.24 V	375.1 kg / 827.0 lbs	554 × 604 × 1518 mm / 21.8 × 23.8 × 59.7 in
35.84 kWh	358.4 V	432.6 kg / 953.7 lbs	554 × 604 × 1725 mm / 21.8 × 23.8 × 67.9 in
40.96 kWh	409.64 V	490.1 kg / 1080.6 lbs	554 × 604 × 1932 mm / 21.8 × 23.8 × 76.1 in
46.08 kWh	460.84 V	547.6 kg / 1207.1 lbs	554 × 604 × 2139 mm / 21.8 × 23.8 × 84.2 in
51.20 kWh	512.0 V	605.1 kg / 1334.5 lbs	554 × 604 × 2346 mm / 21.8 × 23.8 × 92.4 in

Application Cases

